

## AURI-TX2N / AURI-TX2N-D Transmitter Datasheet

The TX2N Auracast Transmitter is the heart of an Auri system, providing long range, low latency Auracast™ compliant broadcast audio.

A factory option for integrated Dante input is available.


### Key Features

- 2 radios with flexible routing options
- Expandable with repeater mode
- Network management
- 2 balanced mic/line inputs with phantom power
- Optional integrated Dante
- Powered by USB-C or PoE

### Contents

- 1x AURI-TX2N or AURI-TX2N-D Transmitter
- 1x Universal mounting bracket
- 3x Euroblock connectors
- 1x 1.8 m (6 ft) Cat6 cable
- 1x Quick Start Guide and Safety Data Sheet

Note: This unit does not come with a power supply, it can be powered by PoE or a USB-C supply available separately (LA-425).

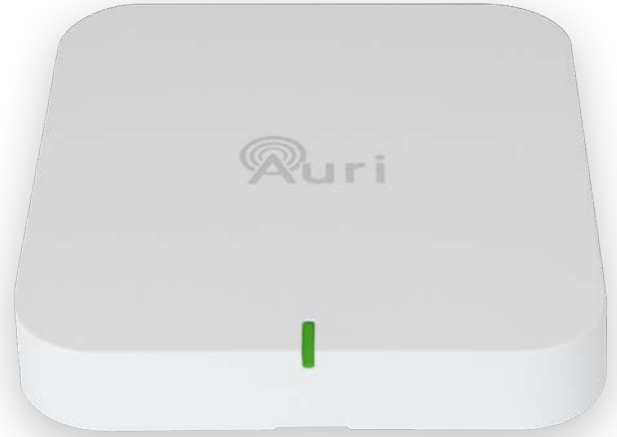

### Product Specifications

Inputs	
Input selection	2x audio inputs individually selectable between mic, line or optional Dante modes
<b>Mic/Line Inputs</b>	
Connection	2x 3-way 3.5mm pitch Euroblock
Input impedance	15kΩ
THD+N	0.03% at 0dBu (line mode) 0.02% at -25dBu (mic mode)
Common mode rejection	56dB
<b>Microphone Mode</b>	
Max level before clipping	-25 dBu
Sensitivity	-65 dBu
Switchable phantom power	+24 V
<b>Line Mode</b>	
Max level before clipping	+16 dBu
Sensitivity	-25 dBu
<b>Dante (optional)</b>	
Connection	Dedicated RJ45 socket
Port speed	100 Mbit
Channels	2
Sample rates	48 kHz
Outputs	
<b>Line Output</b>	
Connection	1x 3-way 2.5mm pitch Euroblock
Nominal output level	+1dBu

Output impedance	150Ω
<b>Radio</b>	
Bluetooth version	5.3
Operating Frequency	2400 to 2482 MHz
Operating mode	Auracast™ Compliant, Broadcast Only
Supported codec	LC3
Maximum output power	North America: +20dBm Rest of World: +10dBm
Output power control	Attenuation from regional max to -10dBm
Encryption	AES128-CCM encryption, with 4-16 character password
Supported formats	Mono or Stereo
<b>Network Audio</b>	
Input routing	Additional input source for each audio stream, must be selected from another TX2N on same network
Connection	Shared RJ45 with control and PoE
Channels	2x stereo inputs 2x stereo outputs
Format	Multicast RTP
Bit depth	16 bit
Sample rate	16kHz, 24kHz or 48kHz, matched to broadcast
Bandwidth	0.5Mbit/s (16kHz) to 1.5Mbit/s (48kHz) per stereo stream
Latency	5 ms nominal
<b>Audio Processing</b>	
Input routing	Disabled, Input 1 Only, Input 2 Only, Input 1 & 2 Stereo Pair, Input 1 & 2 Mono Sum
AGC	Switchable, 20dB gain control range
Low cut	Switchable, 24 dB/oct, frequency based on sample rate 16 kHz sample rate: 75 Hz 24 kHz sample rate: 110 Hz 48 kHz sample rate: 220 Hz
Sample rates	16 kHz, 24 kHz (Auracast Standard - required) 48 kHz (Auracast High)
Frequency response +/- 3 dB (internal, line in to line out)	16 kHz sample rate: 50 Hz – 7.5 kHz 24 kHz sample rate: 50 Hz – 11.0 kHz 48 kHz sample rate: 50 Hz – 22.5 kHz
Latency (internal, line in to line out)	13ms
Latency (complete system, end to end)	Auri RX1 – 29 ms to 45 ms (dependant on sample rate and mono/stereo) Other receivers will vary
<b>Network</b>	
Port speed	100 Mbit
IP address	DHCP, static or link-local
Protocols	mDNS, UDP (unicast), RTP (multicast), RTCP (multicast)
Security	UDP communication AES256-GCM
<b>Controls and Indication</b>	
Buttons	Recessed restart and factory reset buttons
Setup/Programming	Via Auri Manager Software

Status LED	RGB multi-function LED, see handbook for states
<b>Power</b>	
PoE	IEEE 802.3af
USB-C	5V PD Compliant
Power consumption (nominal)	USB-C: 5V, 370mA (1.85W) PoE: 48V, 53mA (2.54W)
<b>Physical</b>	
Dimensions	183 x 173 x 48 mm (7.20 x 6.81 x 1.89 in.)
Weight	TX2N – 0.45 kg (0.99 lbs.) TX2N-D – 0.47 kg (1.04 lbs.)
Shipping Weight	TX2N – 0.89 kg (1.96 lbs.) TX2N-D – 0.91 kg (2.01 lbs.)
Enclosure Material	PC-ABS
Colour	White
Mounting	Removable wall/ceiling bracket Multiple holes to support mounting on standard UK, EU and US electrical back boxes and VESA 75
<b>Environmental</b>	
Temperature - Storage	-40 °C (-40 °F) to 70 °C (+158 °F)
Temperature - Operation	-10 °C (14 °F) to 40 °C (+104 °F)
Relative Humidity	0 to 95% relative humidity, non-condensing
IP Rating	IP30 (with mounting bracket attached)
<b>Compliance</b>	
Standards	FCC, ISED, CE, UKCA, RCM, MIC, RoHS, REACH, WEEE Specifications subject to change without notice

## Network Requirements

Usage	Type	Address	Port
Device discovery	mDNS (Multicast)	224.0.0.251	5353
Control	UDP (Unicast)	Device IP (DHCP, Static or Link Local)	55666, 56666
Firmware Update	TFTP	Device IP	69
Network Audio	RTP (Multicast)	239.255.0.0/16	5004, 5006, 5008, 5012
Network Audio	RTCP (Multicast)	239.255.0.0/16	5005



AMPETRONIC Unit 2, Trentside Business Village, Farndon Road, Newark NG24 4XB,  
United Kingdom | Phone: +44.1636.610062 [www.ampetronic.com](http://www.ampetronic.com)



LISTEN TECHNOLOGIES 14912 Heritage Crest Way, Bluffdale, Utah 84065-4818  
USA | Phone: +1.801.233.8992 Toll-Free: 1.800.330.0891 [www.listentech.com](http://www.listentech.com)

The Bluetooth® word marks and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Listen Technologies and Ampetronic are under license.  
Other trademarks are trade names of their respective owners. Windows® is a trademark of the Microsoft® group of companies.

20250701 | UP3B601-2